


PLAN VIEW

Locking Penta Bolt

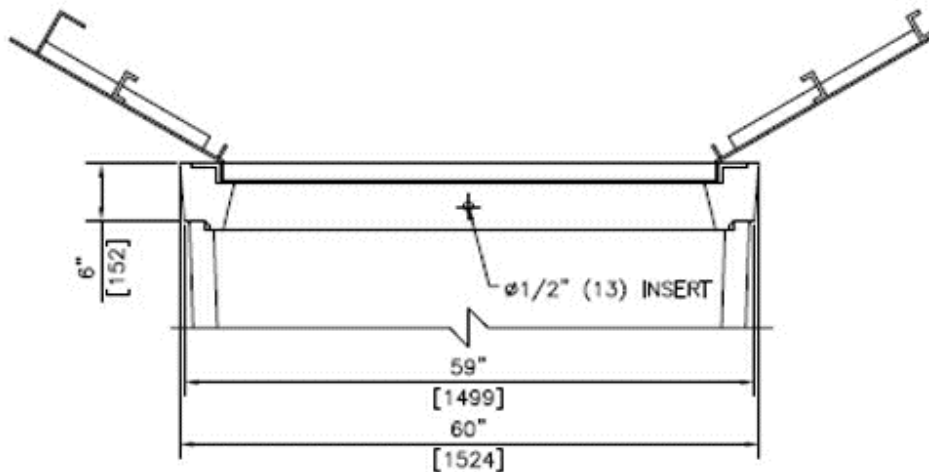

SECTION

NOTES:

- 1) 27.6 MPa @ 28 DAYS
- 2) MEETS H-20 LOADING



**SOUTH OKANAGAN
CONCRETE PRODUCTS LTD**

TEL: 250-495-7556

socp@socp.ca

www.socp.ca

1 Phase PJB Steel Lid /c
Concrete Collar U-J1-1

Product #

1203