


PLAN VIEW

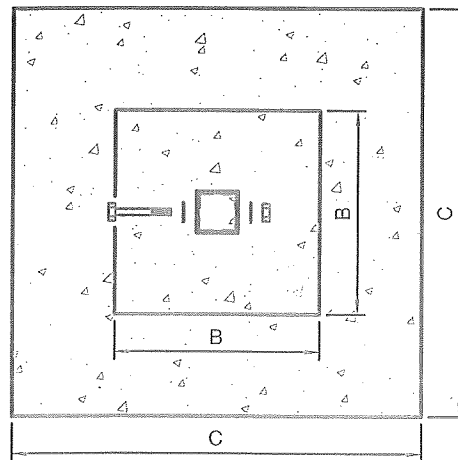

FRONT VIEW

NOTES:

1. THE BOTTOM OF LOWEST SIGN SHALL BE 2.1m ABOVE THE SIDEWALK, SHOULDER ... UNLESS DIRECTED OTHERWISE.
2. ALL SIGNS SHOULD BE MOUNTED APPROXIMATELY AT RIGHT ANGLES TO THE TRAFFIC FLOW AND FACING THE TRAFFIC THEY ARE INTENDED TO SERVE.
3. SIGNS SHALL NOT OVERHANG ROADWAY / TRAVEL LANE.
4. SIGNS UP TO 750mm HEIGHT SHALL HAVE 2 BOLTS, LARGER SIGNS WILL HAVE A MINIMUM OF 3 BOLTS.
5. SIGNS SHALL BE MOUNTED WITH A 3/8" HEX BOLT, FLAT WASHER, AND NYLON WASHER AGAINST THE SIGN FACE. A FLAT WASHER AND NUT SHALL BE AGAINST THE TELESPAR. ALL FASTENERS ARE TO BE STAINLESS STEEL.
6. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

BASE TYPE	APPLICATION	A	B	C
1	SINGLE POST SIGNS IN PAVED ISLANDS OR CONCRETE SIDEWALKS	610	203	305
2	SINGLE OR TWO POST SIGNS IN GRAVEL SHOULDER	750	300	600

TOWN OF OSOYOOS

CONCRETE SIGN BASE
AND SIGNAGE



DWN. BY:	TT
CHK. BY:	SU
DATE:	DEC 2013
SCALE:	N.T.S.
DWG. NO.:	R-14
REV.:	