



102 mm (4") Terminators  
4 per side

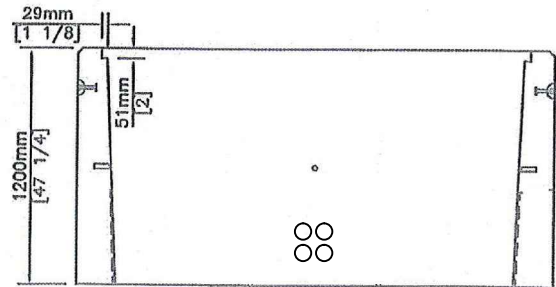

NOTE:

- 1 - CONCRETE, MINIMUM 28 DAYS STRENGTH TO BE 30Mpa -TYPE 50
- 2 - REINFORCEMENT TO BE WELDED WIRE FABRIC TO CSA G30.3-1983
- 3 - SUFFICIENT LAP STRENGTH FOR REINFORCEMENT SHOULD BE PROVIDED TO ENSURE CONTINUITY OF REINFORCEMENT.
- 4 - MINIMUM CONCRETE COVER FOR REINFORCEMENT  
A) 30mm FOR OUTSIDE FACE OF BOX PAD  
B) 20mm FOR INSIDE FACE OF BOX PAD
- 5 - MASS: 8935 Lbs / 4060 Kg
- 6 - BASE IS SIZED TO ACCOMMODATE 15KV -- 25KV SWITCHGEAR
- 7 - UNLESS OTHERWISE INDICATED, ALL DIMENSIONS ARE IN MILLIMETRES
- 8 - LIFTING ANCHOR IS 2.5 TON 3 3/8" LENGTH UNLIFTER

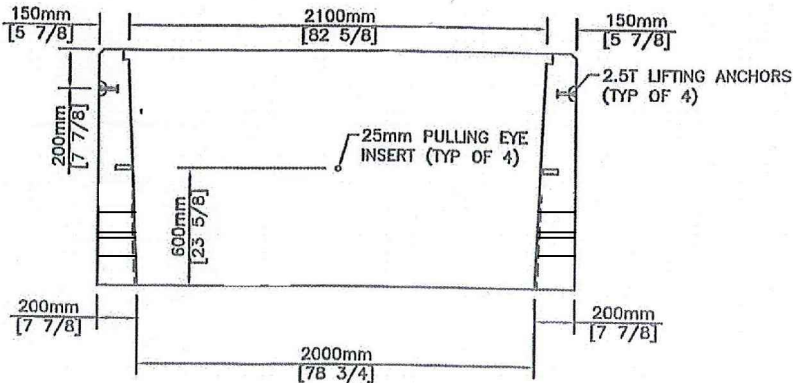

TEL: 250-495-7556  
socp@socp.ca  
www.socp.ca

1595 Fortis Switch  
Cubicle Base c/w Terminators

Product #

1129